


ROBUS®

DOWNLIGHTS

LOGAN CCT3 LED DOWNLIGHT

12w

CCT3

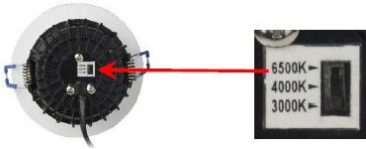

PRODUCT INFORMATION DOCUMENT

FEATURES

- Switch on the back of the fitting allows selection between 3,000K, 4,000K and 6,500K colour temperature.
- Offers Thermal Insulation rating of IC-4
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)

CONSTRUCTION

- Aluminum housing
- Matt White Powder coated Bezel
- PMMA diffuser
- Prewired with 520mm flex and plug with 2 pin connect to remote driver



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



DIMMING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



CCT




SAFETY CLASS



IC-4

AU	R12WDLCT3-01
Comparable to:	70W halogen
Total Power (W):	11.6/11.1/11.5
Total Light Output (lm):	1,010/1,100/1,080
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	87/99/94
IP:	44
Operation Temperature (°C)	-20 ≤ Ta ≤ +40
Lux at 1m (lux):	430/470/460
Emergency Lux at 1m (lux):	NA
Power Factor (PF):	0.95
CCT (K):	3000/4000/6500
RG Value:	0
Rated Life to L70B50 (Hrs):	>30000
Dimensions ØxH (mm):	108x51
Cut Out (mm):	89
Weight (kg):	0.34

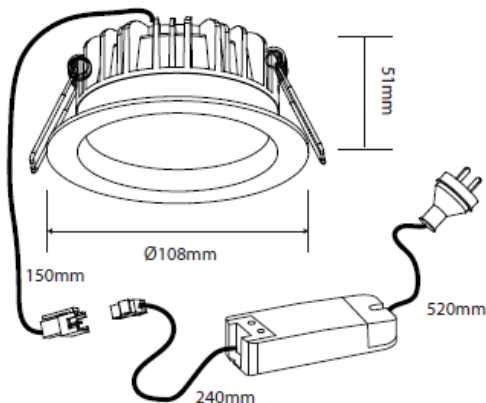


Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

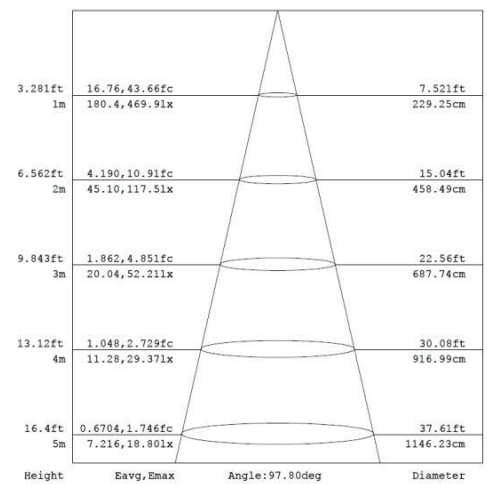

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.
Diagram for R12WDLCT3-01 in 4000K. Other diagrams available on request